


Duplex Round Far Transmission Cable

Profile:

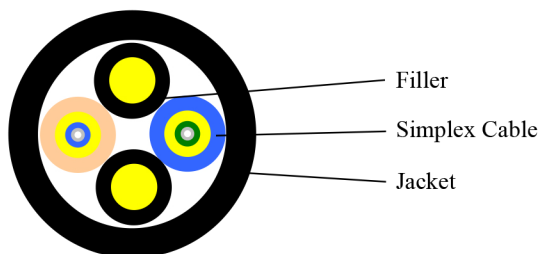

Fiber Parameters:

No.	Items		Unit	Specification
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2 ± 0.4
		1550nm	μm	10.4 ± 0.5
2	Cladding Diameter		μm	124.8 ± 0.7
3	Cladding Non-Circularity		%	≤ 0.7
4	Core-Cladding Concentricity Error		μm	≤ 0.5
5	Coating Diameter		μm	245 ± 5
6	Coating Non-Circularity		%	≤ 6.0
7	Cladding-Coating Concentricity Error		μm	≤ 12.0
8	Cable Cutoff Wavelength		nm	$\lambda_{cc}\leq 1260$
9	Attenuation(max.)	1310nm	dB/km	≤ 0.4
		1550nm	dB/km	≤ 0.3