



Optical cable assembly, DLC/DLC, GYFJH, 2Core. Outdoor Protected Branch Cable

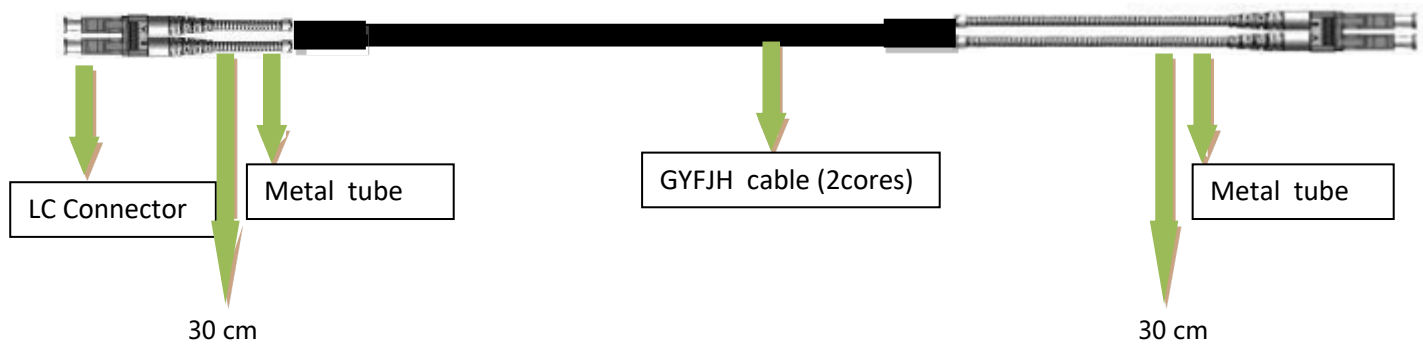

Specification

1. GYFJH Cable

1.1 Structure:

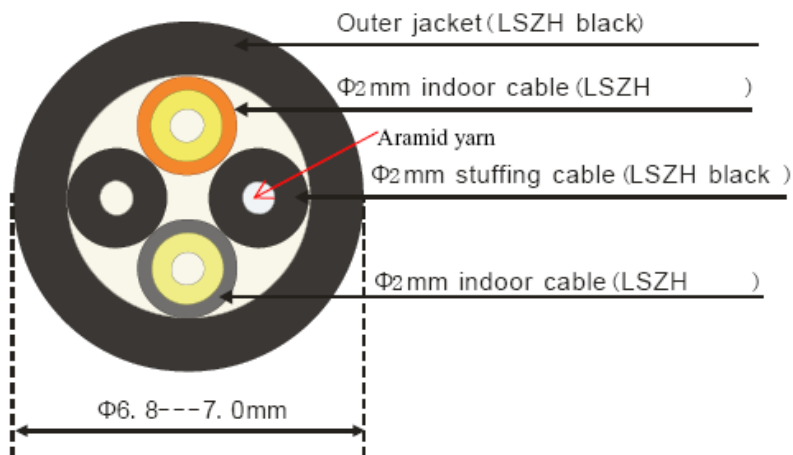

1.2 Application

Mainly used in wireless base station horizontal and vertical cabling

1.3 Features

- 1, Good mechanical and environmental characteristics;
- 2, Flame retardant characteristics meet the requirements of relevant standards;
- 3, The mechanical characteristics of jacket meet the requirements of relevant standards;

4, Soft, flexible, water blocked, UV resistant, easy to lay and splice, and with big capacity data transmission;

5, Meet various requirements of market and clients

1.4 Cable Parameters

Fiber Count	Cable Dimension mm	Cable Weight kg/km	Tensile N		Crush N/100mm		Min. Bend Radius mm		Range of Temperature
			Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
2	7.0	42.3	200	400	1100	2200	20D	10D	-30-+70

Note: 1. All the values in the table, which are for reference only, are subject to change without notice;

2. The cable dimension and weight are subject to the simplex cable of 2.0 outer diameter;

3. D is outer diameter of the round cable;